
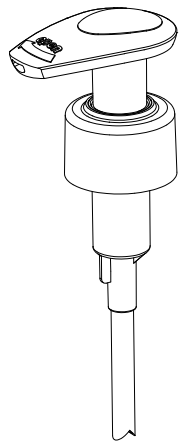
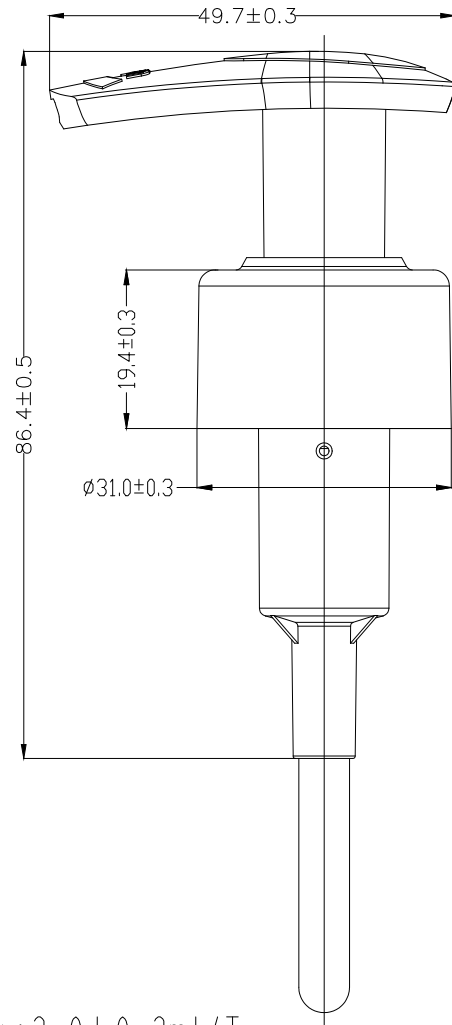


K

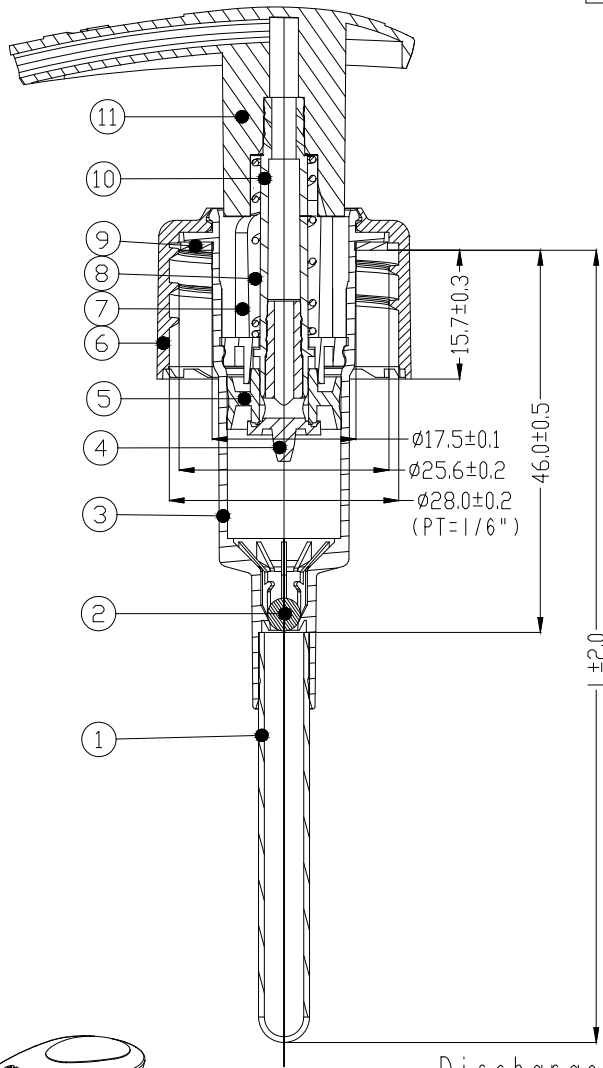

Scale 0.500

Section A-A

Discharge Rate: $2.0 \pm 0.2 \text{ ml/T}$
 Weight: $10.5 \pm 0.5 \text{ g}$ (No Dip Tube)

11	Actuator	PP	Color for order form		I	
10	Stem	POM	Natural		I	
9	Gasket	PE	$\varnothing 25.5 \times 1.2$ thickness		I	
8	Spring	SUS304	$\varnothing 0.84 \times \varnothing 7.5 \times 30.0 \text{ L} \times 9$ circle		I	
7	Switch	PP	Natural		I	
6	Closure	PP	Color for order form		I	
5	Piston	LDPE	Natural		I	
4	Needle	POM	Natural		I	
3	Housing	PP	Natural		I	
2	Ball	Glass	$\varnothing 4.0$		I	
1	Dip Tube	LDPE	$\varnothing 6.20 \times 0.65$ thickness		I	
NO.	Component	Material	Specification	Part No.	QTY	Remark

TOLERANCE						
0mm-15mm	± 0.05	± 0.10	± 0.50	DRAFTER:	UNIT: mm	
15mm-30mm	± 0.05	± 0.15	± 1.00	CHECKED:	MODEL NAME:	TITLE:
30mm-50mm	± 0.10	± 0.20	± 1.50		SR310	SR310VI-N-HV-28-410 S
50mm-99mm	± 0.15	± 0.30	± 2.00	CENSOR:	SCALE:	VISUAL ANGLE
ABOVE 99mm	± 0.20	± 0.40	± 2.50		1.5:1	 Q'TY: 1/1 REV: A0
CENTER	± 0.10	± 0.50	± 1.00	APPROVED:	PART NO:	FILE NO:
ANGLER	$\pm 0.25^\circ$	$\pm 0.50^\circ$	$\pm 2.00^\circ$		ASR3100008	D-



**POWER
BRANDS**
DISTRIBUTION